

# WINOX-BL/BR

## WEIGHBRIDGE INDICATOR

LAUMAS®



4 D-SUB connectors - IP40



Stabilized power supply included  
24 VDC/1 A - 100 ÷ 240 VAC input  
3 m cable length

### DESCRIPTION

- AISI 304 stainless steel desk weight indicator.
- Dimensions: 286x85x206 mm.
- *BL version*: 6-digit semi-alphanumeric backlit LCD display (20 mm height) - 46 signalling symbols.
- *BR version*: 6-digit semi-alphanumeric red LED display (20 mm height) - 16 signaling LED.
- 19-key keyboard.
- IP40 protection rating.
- IP68 front panel protection rating.
- Real-time clock/calendar with buffer battery.
- Power supply included.
- D-SUB connectors.

### INPUTS/OUTPUTS AND COMMUNICATION

- 3 serial ports (2x RS485 and 1x RS232) for communication via protocols ModBus RTU, ASCII Laumas bidirectional or continuous one way transmission.
- 4 relay outputs controlled by the setpoint values or via protocols.
- 2 optoisolated PNP digital inputs: status reading via serial communication protocols.
- 1 load cell dedicated input.

### CERTIFICATIONS



OIML R76:2006, class III, 3x10000 divisions, 0.2  $\mu$ V/VS1

CERTIFICATIONS ON REQUEST



UL Recognized component - Complies with the United States and Canada standards



Complies with the Eurasian Custom Union standards



NMI Trade Approved - Complies with the Australian standards for legal use with third parties




Complies with with the regulations of the Russian Federation for legal use with third parties

### MAIN FUNCTIONS

- Connections to:
  - PC/PLC via RS485/RS232 (up to 99 instruments with line repeaters, up to 32 without line repeaters);
  - remote display and printer via RS485/RS232;
  - up to 8 load cells, 350  $\Omega$ , (or 16 load cells, 700  $\Omega$ ) in parallel by junction box;
  - intelligent junction box or other multichannel instruments: allow the use of advanced functions as digital equalization, load distribution analysis and automatic diagnostics.
- Double weighing (entry and exit), single weighing (entry or exit), double weighing with trailer, single weighing with trailer, multiple weighing (weighing of multi-compartment trucks).
- Simultaneous management of 254 trucks.
- Open input weighings archive (max 254).
- Database with 999 preset tares.
- Up to 10000 weighings that can be saved in alibi memory.
- Traffic light management via relay outputs.
- Totals management (loaded and unloaded products).
- Printing of displayed weight, open weighings, totals, and last weighing done.
- Customizable printouts (header) via PC software.
- Digital filter to reduce the effects of weight oscillation.
- Theoretical calibration (via keyboard) and real calibration (with sample weights and the possibility of weight linearization up to 5 points).
- Tare weight zero setting.
- Automatic zero setting at power-on.
- Gross weight zero tracking.
- Semi-automatic tare (net/gross weight) and preset tare.
- Semi-automatic zero.
- Direct connection between RS485 and RS232 without converter.
- Hysteresis and setpoint value setting.

### TECHNICAL FEATURES

Power supply and consumption	12÷24 VDC $\pm$ 10%; 6 W	
Number of load cells • Load cells supply	up to 8 (350 $\Omega$ ) or 16 (700 $\Omega$ ) - 4/6 wires • 5 VDC/120 mA	
Linearity	<0.01% full scale	
Thermal drift	<0.0005% full scale/°C	
A/D Converter	24 bit (16000000 points) - 4.8 kHz	
Divisions (with measurement range $\pm$ 10 mV and sensitivity 2 mV/V)	$\pm$ 999999 • 0.01 $\mu$ V/d	
Measurement range	$\pm$ 39 mV	
Usable load cells sensitivity	$\pm$ 7 mV/V	
Conversions per second	300/s	
Display range	$\pm$ 999999	
Decimals • Display increments	0÷4 • $\times$ 1 $\times$ 2 $\times$ 5 $\times$ 10 $\times$ 20 $\times$ 50 $\times$ 100	
Digital filter • Readings per second	10 levels • 5÷300 Hz	
Relay outputs	4 - max 115 VAC/150 mA	
Optoisolated digital inputs	2 - 5÷24 VDC PNP	
Serial ports	2x RS485, 1x RS232	
Baud rate	2400, 4800, 9600, 19200, 38400, 115200 (bit/s)	
Humidity (condensate free)	85%	
Storage temperature	-30 °C +80 °C	
Working temperature	-20 °C +60 °C	
	Relay outputs	4 - max 30 VAC, 60 VDC/150 mA
	Working temperature	-20 °C +50 °C
	Equipment to be powered by 12-24 VDC LPS or Class 2 power source	

### METROLOGICAL SPECIFICATIONS OF TYPE-APPROVED INSTRUMENTS

Applied standards	2014/31/UE - EN45501:2015 - OIML R76:2006
Operation modes	single interval, multi-interval, multiple range
Accuracy class	III or IIII
Maximum number of scale verification divisions	10000 (class III); 1000 (class IIII)
Minimum input signal for scale verification division	0.2 $\mu$ V/VSI
Working temperature	-10 °C +40 °C

### INTELLIGENT JUNCTION BOXES

The weight indicator displays the intelligent junction box functions.


Example:

LOAD DISTRIBUTION ON THE 8 INDEPENDENT CHANNELS	
1C	9.7
2C	13.8
3C	14.9
4C	8.7
5C	20.3
6C	32.5
7C	Err
8C	OFF

Load percentage on each active channel

ERROR: connection problem

OFF: channel not active

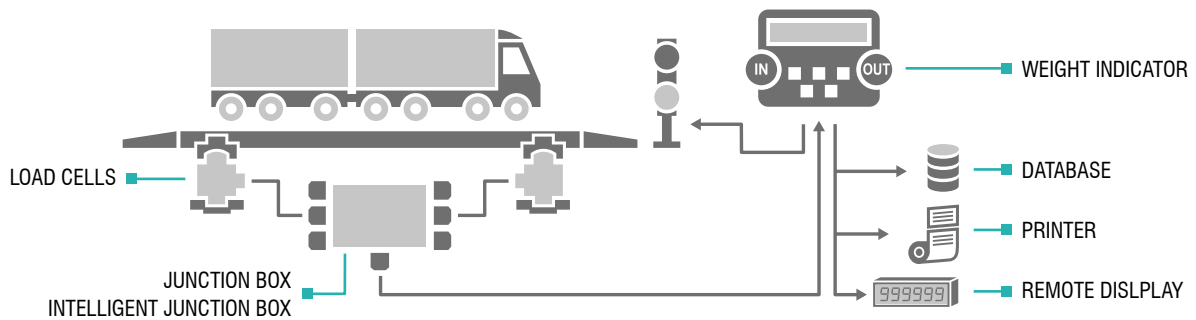

### PRINTER

Supported external printers:  
Epson TM-U295  
Epson LX300  
Custom Kube II  
**Laumas STAVT II**  
*Other models on request.*

CUSTOMIZABLE PRINTOUT

Printout example refers to the integrated printer.

24/01/13 10:37:03  
PRINTOUT NUMBER 21  
CODE 4  
ENTRY A: 26000 kg

Epson name is the exclusive property of Seiko Epson Corporation; "Custom" name is the exclusive property of Custom Group SpA.

### DATABASE

The database allows you to associate a preset tare value to an identification code (ID).

### REMOTE DISPLAY

Suitable for weight remote displaying.

RIP6100

10729 kg

### OPTIONS ON REQUEST

DESCRIPTION	CODE
<p>Alibi memory.</p>	OPZWALIBI

The Company reserves the right to make changes to the technical data, drawings and images without notice.