



More information on the website  
[radwag.com/en/info,w1,UFX](http://radwag.com/en/info,w1,UFX)

# PM02.EX-2-2 Intrinsically Safe Power Supply Intended for Ex Scale



## Datasheet




Protection class	IP66 / IP68
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Working in zones	-
<b>Electrical parameters</b>	
Power supply	100-240 V AC 50/60 Hz
Power consumption max.	15 W
<b>Environmental conditions</b>	
Operating temperature	-20 ÷ +40 °C
Storage temperature	-20 ÷ +60 °C
Relative humidity	10% ÷ 85% RH no condensation
<b>Construction</b>	
Housing	stainless steel
<b>Physical parameters</b>	
Device dimensions	216×174×64 mm

## Compatible with

Stainless Steel HRP EX.H Platforms  
Stainless steel HRP.H platforms

HRP Platforms High Capacity  
HRP EX Platforms

## Device dimensions

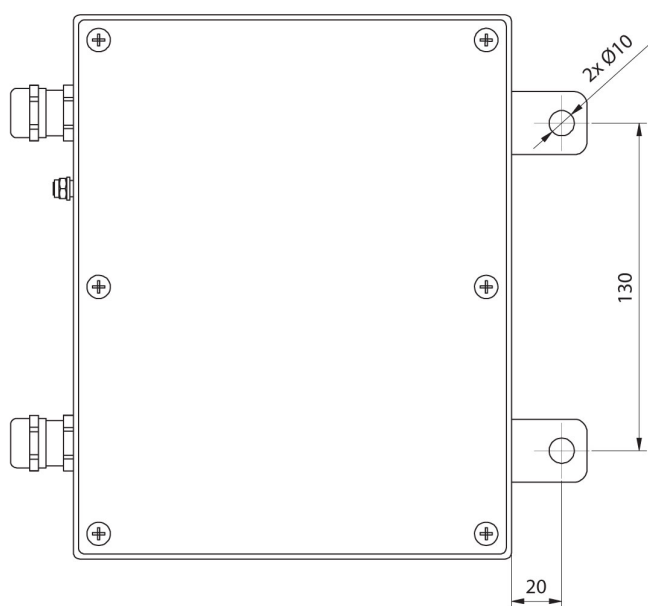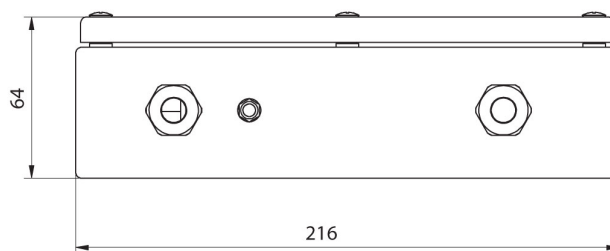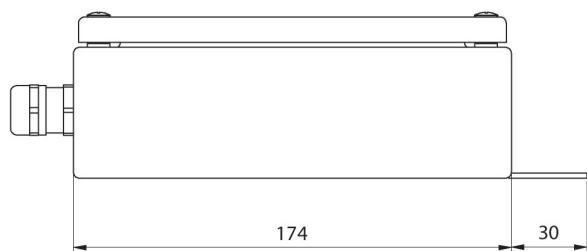

PM01.EX